UNIQUE FEATURES OF TRIOMIX 2 NEW EDITION:

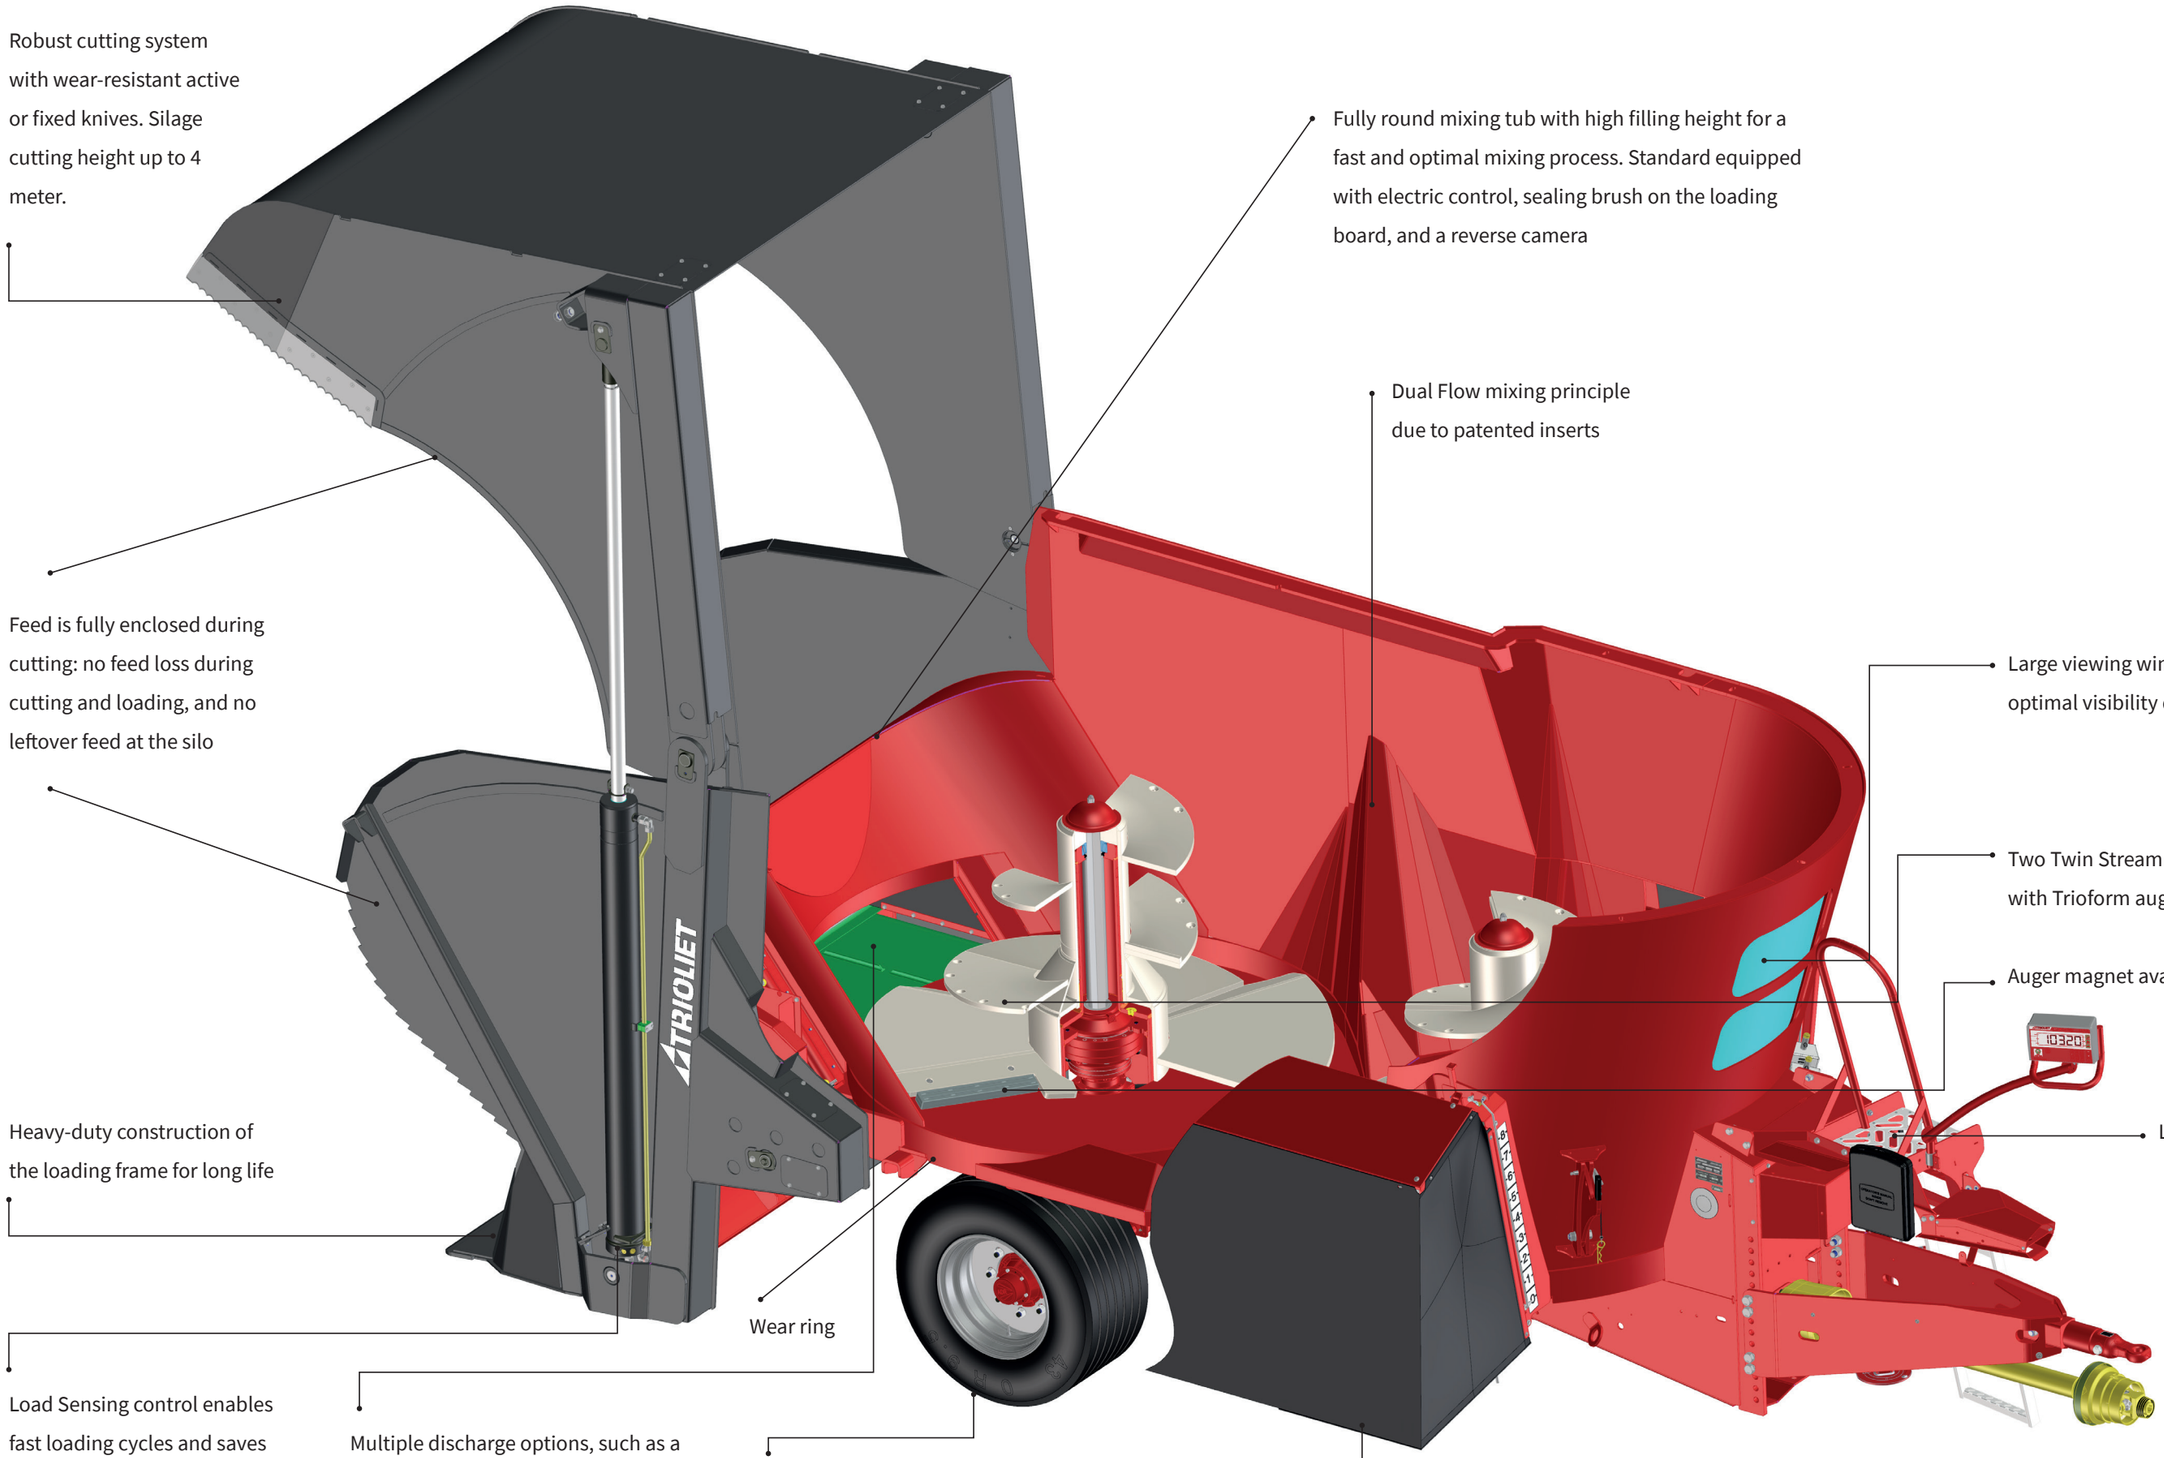

Robust cutting system with wear-resistant active or fixed knives. Silage cutting height up to 4 meter.

Fully round mixing tub with high filling height for a fast and optimal mixing process. Standard equipped with electric control, sealing brush on the loading board, and a reverse camera

Dual Flow mixing principle due to patented inserts

Feed is fully enclosed during cutting: no feed loss during cutting and loading, and no leftover feed at the silo

Large viewing window for optimal visibility during mixing

Two Twin Stream Life Long Life augers with Trioform auger knives.

Auger magnet available as an option

Heavy-duty construction of the loading frame for long life

Ladder with platform

Wear ring

Load Sensing control enables fast loading cycles and saves fuel

Multiple discharge options, such as a cross conveyor belt at the rear (AL) or at front (VL) for quick discharge in all barn situations.

Wheel axle with two robust single wheels (type 1400 and 1800) and a tandem axle with four wheels (type 2200)

Flexible discharge options: ZK side discharge doors on the left and right at front